

# I Introduction

## I.1 Overview

Geophysics, the science of the physics of the Earth from its magnetosphere to the deep interior, is useful in characterizing the subsurface Earth. Solid-Earth geophysics employs techniques involving the measurement of force fields to study subsurface features and the processes that act upon them. Thus, geophysical studies serve a broad variety of geologic, natural resource, engineering, and environmental purposes. Gravity and magnetic methods, which measure very small spatial and temporal changes in the terrestrial gravity and magnetic force fields, have a wide range of uses from submeter to global scales. Although these methods in most cases fail to match the resolution and precision of direct observations, they are rapid, cost-effective, and non-invasive procedures of studying the inaccessible Earth and optimizing the location of drill holes for direct studies and other remote sensing studies which have higher resolution capabilities.

The application of gravity and magnetic methods generally involves a common approach consisting of planning, data acquisition, data processing, interpretation, and reporting phases. During the planning phase the appropriate method(s) are selected for meeting the objective of the study, and procedures for data acquisition, processing, and interpretation are established. These decisions are reached on the basis of experience, model studies, or test surveys. Special care is taken to determine an error or noise budget for the survey and to consider the propagation of errors, both random and systematic, through the data acquisition and processing chain. Selection of the distribution of observations in the survey region includes consideration of the objective of the study, the geologic, topographic, vegetative cover, and cultural features of the area, access over the region, and financial considerations. The geophysical observations are subject to numerous analytical processing steps to minimize effects from non-germane sources. Interpretation of these processed data involves not only determining the distribution of anomalous masses in the subsurface, but the nature of these masses. The latter commonly requires the translation of properties directly measured by the geophysical method into secondary properties, such as lithology, porosity, and strength, which are more directly related to the survey objective. Interpretation is achieved by transforming the survey data to quantitative models of the subsurface that satisfy the data. However, all interpretations are subject to ambiguities that to a degree depend on the implemented method and procedures and the integration of the results with collateral geological and geophysical information.

## I.2 The Earth and its planetary force fields

Geophysics is an interdisciplinary science that integrates the observations, hypotheses, and laws of geology with the techniques and principles of physics to understand the

composition, nature, structure, and processes of the Earth. Geophysics involves measuring and interpreting phenomena related to the physical nature of the Earth, from its center some 6,371 km beneath the surface to the outer limits of its magnetosphere at altitudes many times the

2 Introduction

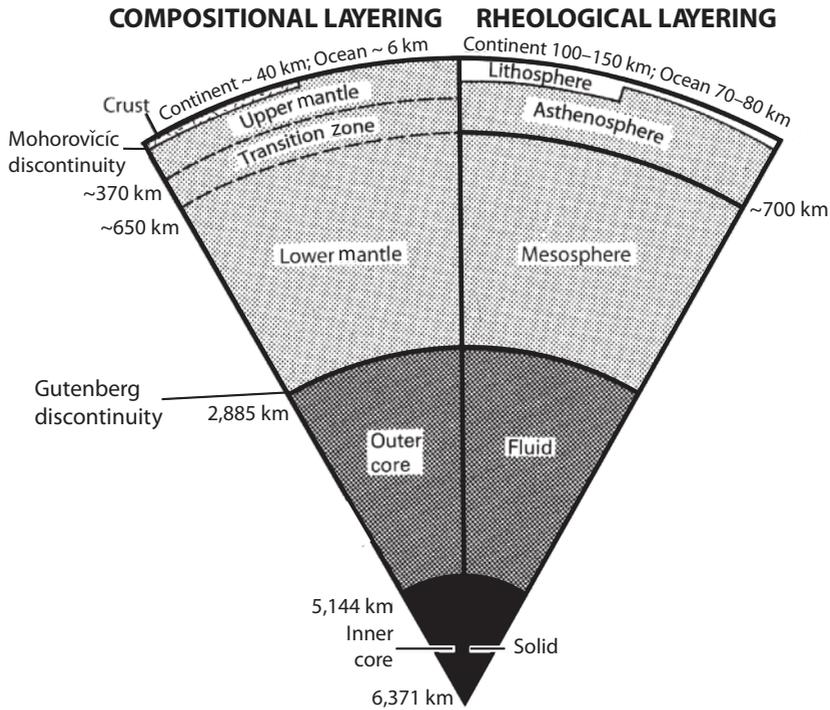


FIGURE 1.1 Cross-section of a segment of the Earth showing major first-order internal subdivisions in composition and mechanical or rheological properties. Table 1.1 lists the mean densities and magnetizations of the Earth's major structural components. Adapted from KEARY and VINE (1990).

radius of the Earth. Thus, it incorporates investigations of the subsurface, hydrosphere, atmosphere, ionosphere, and magnetosphere. In this book, the focus is on solid-Earth geophysics, considering the properties and processes of the Earth primarily within the crust and uppermost mantle (lithosphere) as reflected in the spatial and temporal variations in gravity and magnetic force fields. We are all very aware of these planetary fields. The gravity field is the source of the force which causes all objects to be attracted toward the Earth, and the geomagnetic field controls the compass which is useful in determining geographic directions. These force fields have been and continue to be an important part of the science of geophysics.

Applications of gravity and magnetic methods include micro-scale surveys to map the physical property variations of the upper meter or two of the subsurface, or conducted within drill holes to establish the physical properties of the adjacent rocks. Larger-scale applications include regional to global surveys designed to image the deeper variations of the Earth's crust, mantle, and core (Figure 1.1). The crust is the outermost surface rind that consists of surface-like rocks extending to depths as great as 70 km. The crust overlies the mantle, made up of higher density and velocity but generally non-magnetic rocks and

TABLE 1.1 The average densities  $\langle \sigma \rangle$  and magnetizations  $\langle J \rangle$  in  $\text{kg/m}^3$  and  $\text{A/m}$ , respectively, of the Earth's major structural elements shown in Figure 1.1.

Structure	$\langle \sigma \rangle$	$\langle J \rangle$
Upper crust	2,200–2,900	0–5
Lower crust	2,800–3,100	2–10
Upper mantle	3,300	0
Asthenosphere	3,300–4,000	0
Lower mantle	4,400–5,500	0
Outer core	9,900–12,200	0*
Inner core	12,800–13,100	0

\*If the terrestrial field were caused by magnetization in the Earth's outer core, its effective magnetization would be  $\sim 1.7 \times 10^3 \text{ A/m}$ .

extending to a depth of roughly 2,900 km, which in turn lies directly on the roughly spherical, dense, largely metallic core of the Earth in which the main terrestrial magnetic field originates. The lithosphere is the outermost semi-rigid shell consisting of the crust and uppermost mantle. It normally has a thickness of roughly 150 km beneath the continents and less in oceanic regions, and is the source of

most of the variations in the gravity and magnetic fields of the Earth.

The crust exhibits highly complex structural and compositional properties that reflect the effects of erosion, sedimentation, metamorphism, tectonics, and igneous activity, and the plastic movement of the mobile asthenosphere underlying the lithosphere that have occurred over the Earth's 4,600-Myr history. These processes have led to the differentiation of chemical elements, deposition of a variety of sediments, vertical and horizontal movements, zones of crustal weakness, and the focusing of geological processes, such as volcanism, in limited regions of the Earth. These variations in the nature of the lithosphere and specifically the crust that solid-Earth geophysicists map and investigate are of societal interest because they control the formation and distribution of the Earth's resources, and volcanic, earthquake, and other natural hazards. Geophysics is an efficient and effective method of conducting these investigations, avoiding the problems of direct sampling of the hidden Earth. Nonetheless, these studies come at a cost, because the results of their interpretation are to varying degrees ambiguous and lack the accuracy of direct measurements.

### 1.3 Basis of the gravity and magnetic methods

Gravity and magnetic methods are commonly referred to as potential field methods because the measurements involve a function of the potential of the observed field of force, either the terrestrial gravity or magnetic field, at the observation site. These methods are widely used at a variety of scales to investigate the Earth because in comparison to most other geophysical methods the acquisition of data is inexpensive and rapid, and for many applications the reduction and interpretation of the observations are relatively simple. Furthermore, gravity and magnetic methods always provide information about the subsurface. In addition, there is a large reservoir of these data covering the entire Earth in varying detail that are publicly available at minimal cost to the user.

#### 1.3.1 Gravity

The gravity method involves measurement of very small variations in the Earth's gravitational field, of the order of a few parts per million or lower, caused by lateral variations in density. Most observations are made with highly specialized weighing devices, called gravimeters or gravity meters, which measure the acceleration of gravity. Less frequently, they are made with instrumentation which mea-

sures the gradient or vector components of the gravity field. Gravity variations useful for studying the solid Earth are observed on land, in surface and subsurface water vessels, in drill holes, in the air, and from satellites orbiting the Earth. The variations they measure are dependent on Newton's universal law of gravitation, which takes into account the differential mass and the distance between the source and observation point. Because density is a universal property of matter, gravity is ever-present, but only where the density of the Earth varies laterally will gravity variations be noted that can be related to changes in the nature and structure of the Earth.

Observed gravity variations called anomalies are the differences between the observed and the theoretical field based on planetary considerations and the assumption of radial symmetry of the Earth layers. The anomalies may be either positive or negative depending on the presence of mass excesses or deficiencies, as illustrated in Figure 1.2. Their interpretation is subject to uncertainties in the observation, reduction to anomaly form, and processing and limitations resulting from the inherent ambiguity in their interpretation. However, meaningful interpretations can be obtained with proper use of constraining, collateral geologic, and geophysical information.

A wide range of densities occurs within the crust, from the essentially zero density of air-filled voids in near-surface formations, to densities of unconsolidated sediments with their interstitial openings filled with either air or water, to the highest densities related to iron/magnesium-rich crystalline rocks and metallic ores. Even higher densities are associated with the radial shells that make up the mantle and the core of the Earth. The potentially broad range of contrasting densities in the near-surface, in the crust, and in subcrustal rock materials leads to the wide range of applications of the gravity method.

#### 1.3.2 Magnetism

The magnetic method (commonly referred to as magnetism) is similar to the gravity method in that variations in a planetary field are measured, in this case the magnetic field of the Earth. Observations are readily made to a high precision with portable electronic magnetometers on land, drill holes, sea, and air including measurements from planet-orbiting satellites. Most land areas of the Earth have now been measured by airborne observations and much of the ocean area has been observed either by airborne or shipborne measurements, at least by widely spaced observations. Variations, or anomalies, in the magnetic field of the Earth obey Coulomb's law, which is comparable to Newton's law of gravitation, but takes into account the

#### 4 Introduction

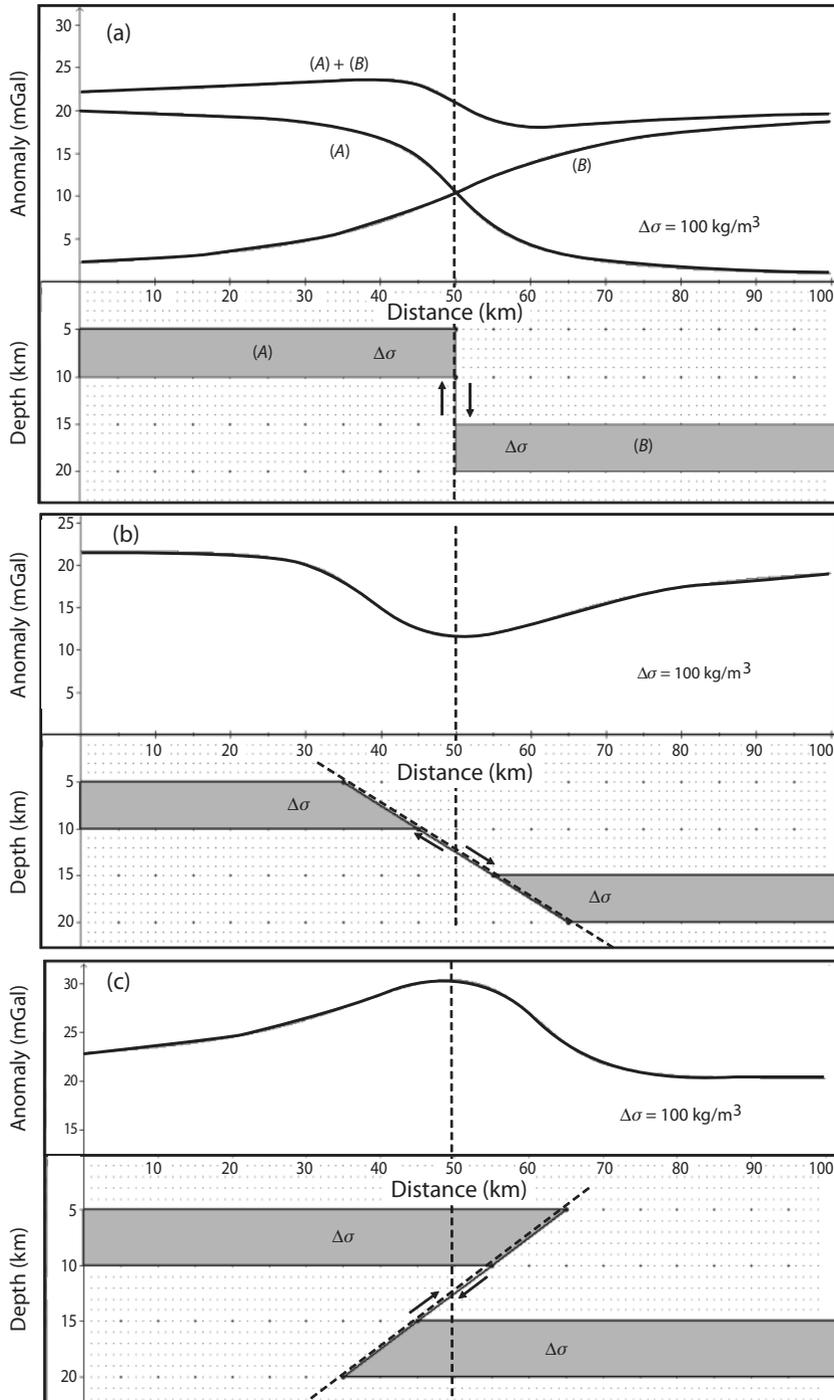


FIGURE 1.2 Examples of vertical gravity effects derived from faulting that offsets a layer of higher density within a formation of lower density. Panel (a) shows the layers vertically offset with the profiles of the gravity effects for the individual layer components (A) and (B), as well as for their total or superimposed effects (A + B). Panels (b) and (c) show the total gravity effect profiles for normal and reverse faulting of the horizontal layers. The illustrated gravity effect is the vertical acceleration of gravity given in units of milligals (mGal) where 1 mGal is equal to  $10^{-3} \text{ cm/s}^2$  or  $10^{-5} \text{ m/s}^2$ .

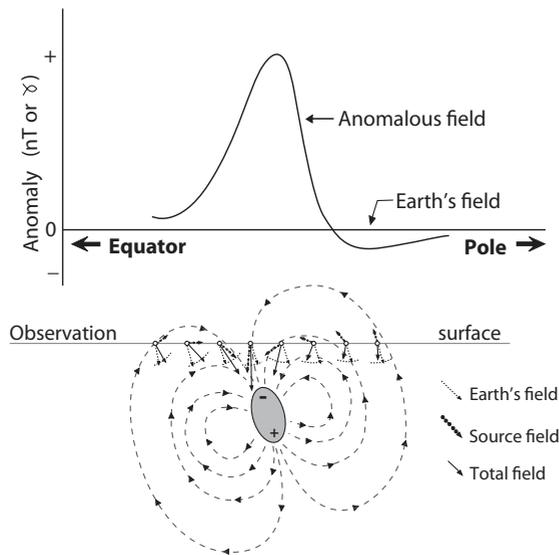


FIGURE 1.3 Example of the total magnetic field variation (anomaly) caused by the magnetic effect of a buried magnetic object (shaded area) magnetized by the Earth's field. The sum of the magnetic field of the anomalous source and the Earth's field produce the observed total magnetic intensity anomaly profile at the top of the figure. Note the asymmetry of the anomaly owing to the inclined magnetization and the negative component of the anomalous field caused by the positive pole of the magnetic source.

magnetic polarization variations of the Earth rather than its mass. Magnetic polarization is dependent on the magnetic susceptibility and the remanent or permanent magnetization of Earth materials. Magnetic susceptibility is a measure of the ease with which a material can be magnetized in the current magnetic field of the Earth; remanent magnetization is the permanent magnetization previously acquired and retained by the material.

All magnetic materials, including the Earth, have two poles, north and south or positive and negative, and thus are called dipolar. Objects of high magnetic susceptibility become polarized or magnetized when they are present in the Earth's dipolar geomagnetic field. Magnetic field observations taken over a buried magnetized object will measure both the positive and negative fields associated with the dipolar magnetization of the object. The resulting anomaly from a high magnetic susceptibility object will combine the fields of both poles as, for example, illustrated in Figure 1.3, but will be dominated by the pole nearest to the observation. The magnetic field of the Earth will induce in the northern geomagnetic hemisphere a negative pole near the top of the anomalous source and a positive pole near the base of the source. The negative pole, being in closer proximity to the observations, will produce

a greater attraction on a north-seeking pole (+) than the repulsion from the negative pole. Accordingly, the magnetic field over the anomalous source will be dominated by an increase in the magnetic field over the Earth's field as shown in Figure 1.3. An inverse anomaly dominated by a decrease in the field would be observed over an object with lower magnetization than the surrounding Earth materials. The magnetization of an object magnetized in the Earth's magnetic field will align with the Earth's field. As a result the anomalous field will vary with location on the Earth's surface owing to the dipolar nature of the main field which roughly aligns with the axis of rotation and the resulting changes in the main field over the Earth's surface.

Unlike crustal rock densities, which generally vary by less than a half-order of magnitude and are directionally independent, magnetic polarization commonly varies over several orders of magnitude, giving rise to large property contrasts, and is directionally variable. The directional attribute of magnetization complicates the interpretation of measurements of the magnetic field, as do the presence of both positive (attractive) and negative (repulsive) poles within all magnetic materials as illustrated in Figure 1.3.

An advantage of the magnetic method over the gravity method is that the field varies inversely one power faster with distance to the source than does the gravity field from the same source. As a result, the magnetic method is more sensitive to the source depth, which is commonly an important objective in interpretation of the observations. Furthermore, the resolving power of the method to distinguish independent sources is greater than that of the gravity method. Magnetic field variations are derived from only a few minerals, and these occur only as accessory minerals in most rocks. However, the measured variations are several parts in a hundred thousand or greater; thus magnetic variations are easier and less costly to map than are gravity anomalies from similar sources. Also, magnetic measurements can readily be made from simple, mobile platforms increasing the surveying rate, making them cost-efficient. As a result the magnetic method is widely applied as a reconnaissance tool in geophysical studies and has several specialized applications in shallow subsurface and crustal studies.

#### 1.4 Foundations of geophysical methods

The foundations of geophysics were developed in the last few centuries through scientific studies of surface geological features by pioneering geologists and the study by early physicists of natural force fields of the Earth. From the seventeenth century onwards, geologists such as Steno,

## 6 Introduction

Smith, Werner, Hutton, Playfair, and Lyell established the basic laws of geology, and explained the formation of rocks. These and other principles are explained in introductory geological texts. The reader unfamiliar with the basics of geology is encouraged to learn the key concepts presented in these books because they are fundamental to the understanding and application of geophysical methods in general, and the gravity and magnetic methods in particular.

Contemporaneous to the early geologic studies, physicists investigated a variety of terrestrial force fields and developed theories and laws to explain their observations. Beginning in the sixteenth century, such prominent scientists in the history of physics as Newton, Galilei, Gilbert, Gauss, Coulomb, Volta, Oersted, Ampere, Bouguer, Faraday, Fresnel, and Maxwell contributed greatly to the science of geophysics. By the mid-nineteenth century, they and their peers had essentially established the foundations of gravitational, magnetic, and electrical fields of the Earth and the basic theory upon which are based current studies of these fields in geophysics. At about that time, instrumentation was becoming available for field geophysical measurements and the potential for subsurface studies with these measurements was being identified.

Building upon improved instrumentation and interpretational techniques developed in the succeeding decades of the twentieth century, particularly after World War I, great progress was made in the use of gravity and magnetic methods in the search for Earth resources. Technological developments, primarily in electronics, during World War II made instrumentation improvements that led to the broad use of computers, electronic magnetometers, accelerometers, ground-penetrating radar, digital recording, and other advanced instrumentation of geophysics. Post-World War II geophysical investigations in geomagnetism, seismology, paleomagnetism, and isotopic age dating of rocks led to the development of the paradigms of seafloor spreading and plate tectonics by Vine, Matthews, Morley, Morgan, Sykes, Runcorn, Oliver, Wilson, Heirtzler, Dalrymple, and others. These paradigms explain the slow movement of crustal units over the Earth's surface as well as the destruction of existing crust and the construction of new crust by interaction with the Earth's mantle. These concepts are essential to understanding the evolution and the geological and physical processes of the Earth, and thus to the application of gravity and magnetic methods.

The latter half of the twentieth century saw technological improvements that resulted in more precise, portable, and inexpensive instrumentation and faster computations. The continuing improvement in computers has been fun-

damental to all of geophysics. Not only have computers made it possible to collect and store huge amounts of data, but they are the keystones to current data processing and presentation technology responsible for today's broad success and acceptance of geophysics.

Progress in geophysics has been driven by societal needs and economic factors as well as by technological advances. In the 1920s and 1930s, the worldwide surge in the number and use of automobiles, with their gasoline-powered internal combustion engines, increased the need for petroleum products. This need could not be met solely with production from petroleum traps located by surface geologic information and wildcat drilling. Geophysics stepped into this void by greatly increasing the chances of discovery. The growth in petroleum exploration geophysics was accelerated by the ever-increasing demands of the post-war surge in the world's economy. The societal and economic pressure caused a revolution in petroleum exploration geophysics that continues today. In a similar way, post-World War II industrial developments and the depletion of mineral resources during the global war forced the broadening of mineral exploration to the geophysical search for new mineral districts and ore deposits which have little or no surface indication.

Petroleum geophysical exploration began with instrumental developments in the early part of the twentieth century that permitted gravity to be measured with a precision necessary to study subsurface geologic structures. These developments led to the first geophysical discovery of petroleum in the United States, which was by the gravity method, in the early 1920s. The use of gravity in petroleum exploration reached a peak shortly after World War II, but its relative role decreased as the reflection seismic method was improved, largely as a result of the computational power of computers and related theoretical developments. Nonetheless, the gravity method has a significant niche and is especially valuable used in concert with the reflection seismic method to constrain possible interpretations. The improvements in the gravity method for hydrocarbon exploration have given impetus to its use not only for this application, but also for shallow zone and regional exploration of the Earth. The successful development of techniques for measuring gravity to a precision useful for exploration using airborne and satellite platforms has given the method a new range of applications.

The magnetic method has been used since the seventeenth century in mineral exploration, especially for iron ore prospecting, but with the advent of airborne magnetic observations after World War II, it has been used on a broad basis for regional geological studies in petroleum

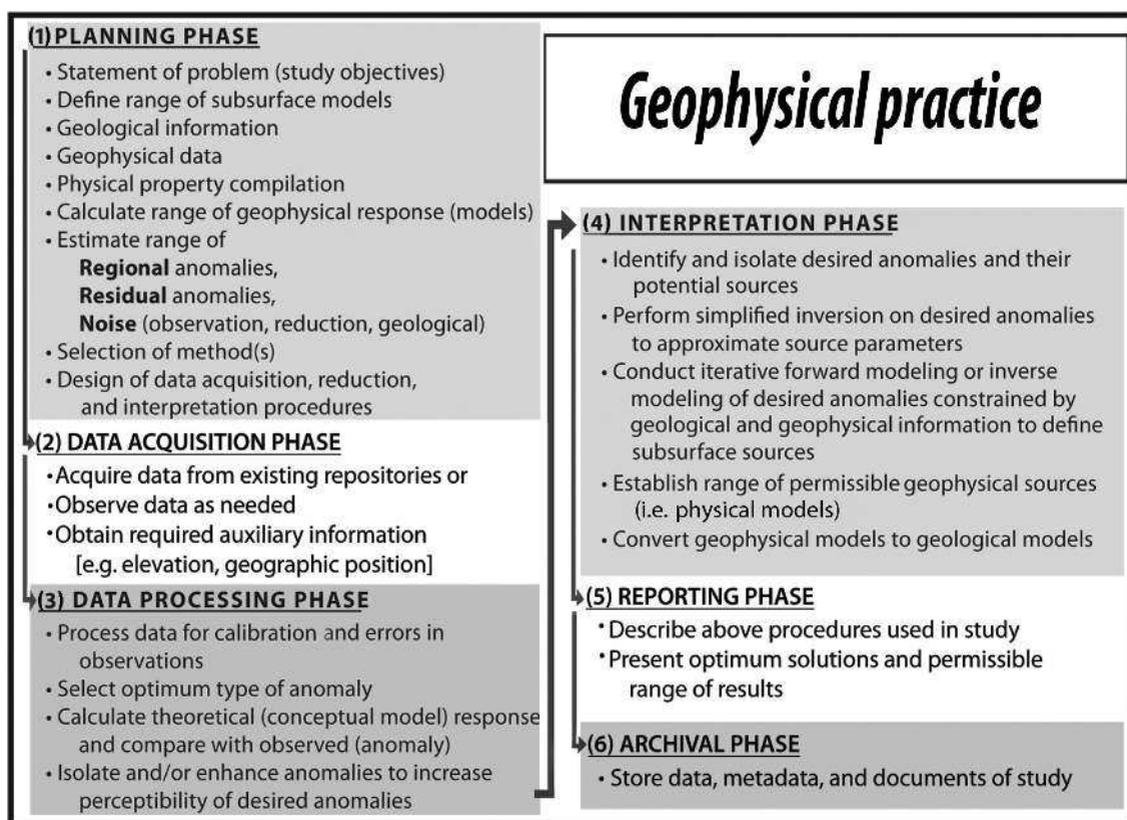


FIGURE 1.4 The geophysical practice for implementing the gravity and magnetic methods involves a sequence of six phases.

exploration, both detailed and regional studies in mineral exploration, and in geologic mapping of crystalline rock terrains where the rock units have varying magnetic polarization. It has also proved useful in identifying ferrometallic objects in the near surface, such as buried well casings, storage containers, and unexploded ordnance and the study of archaeological sites.

The development of satellites and other space age technologies since the 1960s has greatly advanced regional exploration of the surfaces and deep interiors of the Earth and other planetary bodies. Political considerations do not limit satellite operations so that essentially any region is available to satellite remote sensing and geophysical mapping efforts. Unprecedented timing and positioning data from the constellation of Global Positioning Satellites (GPS) greatly expedite modern geophysical survey efforts, while the communication capabilities of satellites allow access to geophysical experiments literally worlds away from our offices and laboratories. Satellite gravity and magnetic observations, in particular, are yielding important new insights on the nature, architecture, and dynamics of the Earth and other terrestrial planets.

## 1.5 Geophysical practices

The gravity and magnetic methods are described in individual chapters that follow. However, in addition to the fundamentals specific to the individual methods, there are general principles and practices that are used in geophysical exploration programs. They are sufficiently general that a description of them serves as an introduction to the use of both gravity and magnetic methods. Whether they deal with the selection of the geophysical method, the design of a data acquisition and processing program, the reporting of an investigation or any one of the numerous components that mark a successful geophysical campaign, they are for the most part nothing more than the application of appropriate scientific methodology (Figure 1.4). The following description assumes that the program involves all phases from planning to report preparation and archiving the data and results. Programs may also focus on previously surveyed data that already have been reduced to anomaly form, where only the latter phases are applicable. Nonetheless, considering the factors for the phases described below will help to determine the usefulness

## 8 Introduction

of existing data. In the individual sections dealing with the gravity and magnetic methods, descriptions are provided of the data acquisition, processing, and interpretation phases, but the planning phase is focused on the principles of the methods and the survey objectives.

### 1.5.1 Planning phase

The planning phase is perhaps the most important step in the geophysical approach because it is in this stage that fundamental decisions are made regarding the nature and procedures of the program. Appropriate planning requires collecting and using all available geological and geophysical data and interpretations, and establishing strong communication links among the interested parties regardless of their particular expertise. Plans should only be finalized after all parties have had the opportunity to interact.

Planning is subdivided into two segments: first, the selection of the appropriate method(s) and, second, the design of the survey and the subsequent data processing and interpretation. To be successful, both require a clear exposition of the objective of the survey. Important collateral information is the specification of the volume of interest to the survey – that is, the areal as well as the depth extent of interest. This subsurface volume is limited as much as possible within the framework of the problem because the areal extent of the survey is a major factor in determining the cost of the survey. In addition, the survey procedures are tuned to the depth of interest as dictated by the survey objectives.

The most important consideration in the selection of the method for a study is to determine if the target sources will produce an observable anomaly even in the presence of extraneous signals. This requires estimation of the anticipated source volume, depth, and physical property contrast as well as evaluation of potential geologic, observational, and processing noise and errors. Information on the physical properties of the Earth materials in the subsurface volume being investigated is important to all phases of the application of geophysical methods, but particularly in planning studies when target anomalies are being estimated. Rock property data are obtained from *in situ* measurements on the site, sample measurements, and general tabulations. The character of target anomalies may come from experience in related situations, forward modeling of both anticipated anomalies and potential anomaly noise, or test surveys. The latter are particularly useful where information needed for modeling of sources and estimating noise and errors is lacking. The parameters of the source targets commonly cover a range of values necessitating the study of a distribution of anomaly

characteristics. Evaluation of anticipated anomalies in reference to the objectives of the investigation may suggest the use of multiple methods. The combined use of gravity and magnetic methods is particularly powerful in studying crystalline rock terrains that consist of large volume sources with both density and magnetic polarization contrasts.

Once the optimum geophysical method or methods have been selected for a study, the survey must be designed to accomplish the objectives in a minimum time at the lowest possible cost without jeopardizing the quality of the survey. The anticipated signal from the anomalous geologic features of interest will dictate many of the attributes of the survey design. Survey design is a matter of maximizing the information obtained and required within the financial limits of the survey. This is often accomplished with a heuristic method based on experience and knowledge of field characteristics, or on a statistically based experiment design methodology as described by CURTIS (2004a and 2004b). The areal coverage of the survey, of course, will be a function of the size of the study area and the anticipated size, depth, and depth extent of the anomalous features. The greater are these parameters, the larger the required size of the survey area. The anomalies often must be isolated from regional and noise effects, thus the survey area must extend well beyond the study area or the areal configuration of the anomalous feature. This is well illustrated for both the gravity and magnetic methods in Figures 1.2 and 1.3, respectively, where the anomaly needed for identification and analysis of the subsurface feature (that is, the fault in the gravity anomaly illustration and the ferrous source in the magnetic anomaly illustration) extends well beyond the immediate region of the anomalous feature.

Critical concerns in planning surveys are selection of the data density and precision. These are determined by the objectives of the survey and characteristics of the anticipated signals. For most objectives the anomalous signal including the maximum gradients must be fully measured, not simply the maximum amplitude of the anomalous signal. In gravity and magnetic surveys it is necessary to map the gradients of the anomalies to effect a useful interpretation. This requirement necessitates closely spaced and high-precision observations. Forward modeling of the range of anticipated anomalies, including their size, properties, and position, provides a basis for selecting the required data density and precision.

In general, sampling theory specifies that the station interval should be no greater than half the length of the smallest dimension that needs to be mapped in the survey. This interval or spacing is referred to as the Nyquist wavelength and its inverse as the Nyquist frequency. It is

## 1.5 Geophysical practices

the maximum spacing that should be used between measurement points, although in practice the sampling interval should be considerably less than the Nyquist sample interval if the gradients of the measurements are of interest or the higher-frequency noise components must be mapped and isolated from the desired signal.

In gravity and magnetic methods, the separation between observations is directly proportional to the depth of investigation – that is, the greater the target depth, the greater is the permissible station spacing. Often a separation approximately equal to half of the depth to anticipated sources is used in surveys. However, generalizations regarding separation of measurement points are of limited value because of the need to consider the specific attributes of the survey. As a result, it may be desirable to determine quantitatively the probability that a specific anomaly will be detected utilizing the sampling theorem, with stations located either randomly through a region or on a regular grid (e.g. *SAMBUELLI and STROBBA, 2002*). Wherever possible, it is desirable to conduct test surveys over a limited, representative portion of the survey area or noise tests to select the optimum survey layouts.

### 1.5.2 Data acquisition phase

In the data acquisition phase, the actual field and necessary related data are measured and recorded. Auxiliary observations that are made in addition to the primary geophysical measurements include essential data for the reduction of the measurements to an interpretable form (e.g. station elevation or flight altitude, surrounding topographic relief, and water depth). Instrumentation must be selected to meet the precision requirements of the survey as established in the planning phase as efficiently as possible. Actual field procedures are dictated by the survey objectives, sources of noise, surface and weather conditions, instrumentation, and access within the survey area. For example, access may limit the survey to discrete observations along roads rather than a grid pattern more useful in interpretation. Observations are commonly made along traverses which are oriented perpendicular to the prevailing strike direction of the anomalies, separated at greater distances than the observations along the traverse. The distance between traverses is determined by estimating the length of the continuity of the character of the anomalies along their strike direction.

Gravity and magnetic methods are particularly effective in a reconnaissance or regional study mode because they are fast and efficient; while other methods may provide better detail and resolution, they are likely to be more costly and time-consuming. Use of gravity and magnetic

methods early in an exploration program sequence can delimit an area for detailed investigations with other methods and improve the survey design to obtain maximum information from measurements. For example, magnetic measurements which often can be taken quickly and inexpensively from an airborne platform may be used to delineate likely faulted areas. In this way limited sectors of a large region can be isolated for study and evaluation in much greater detail by slower and more costly methods, like the seismic reflection method. Similarly, regional gravity surveys may be used to determine the strike direction of prevailing geological features within an area which can guide the selection of the direction of detailed traverses along which gravity or other geophysical fields or forces are measured.

### 1.5.3 Data processing phase

The nature and role of the data processing phase may vary considerably between gravity and magnetic methods and with the survey objectives. In general, the data processing requirements of the magnetic method are considerably simpler than for the gravity method largely because of the intense magnetic polarization contrasts in the crust of the Earth. For example, in some magnetic studies to locate near-surface ferrometallic bodies, the amplitudes of anomalies are sufficiently large that no data processing is needed. However, this is the uncommon situation, particularly with the increasing demands for precision in the results of geophysical studies. Accordingly, most survey objectives and methods lead to data in which the signal to be used in interpretation is significantly distorted by extraneous effects. Data processing is used to remove these extraneous effects and enhance the desired signal for interpretational purposes. Generally, data processing is performed subsequent to acquisition of the raw or observed data, but field processing may be used to minimize unwanted signals. For example, the stabilization of a gravimeter in field procedures may minimize wind-driven accelerations acting on the meter, and field processing by digital filtering can be used to supplement the effect of the field procedure.

Data processing may include several steps. The first is to prepare the data for interpretation by removing the effects of instrumentation as calibration adjustments and correction for instrument instability. These data are then reduced for known or predictable effects upon the observed data by calculating the theoretical value of the observation at a specific site using all known variables, such as elevation and planetary effects, and subtracting this predicted value from the observed measurement to obtain the

## 10 Introduction

anomalous value or anomaly. Data available in publicly available data banks commonly are at this level of processing. The next step is some form of digital filtering to remove wavelengths smaller (noise) and larger (regional) than the anomalies of interest. The purpose of this stage is to enhance particular attributes of the anomaly or signal that will increase its perceptibility and to isolate anomalies of interest for interpretational purposes. Although these procedures are highly automated in most data processing schemes, human interaction is required to establish optimum procedures and parameters.

### 1.5.4 Interpretation phase

The procedures involved in interpretation of the force field measurements into the nature and distribution of subsurface materials or associated processes relevant to the objectives of the investigation are highly varied depending on the goals and scope of the survey and the experience and skills of the interpreter. Successful interpretation commonly involves intangible qualities of the interpreter such as experience, observational powers, ability to visualize in three dimensions, and the intellectual capacity to organize and integrate a variety of often disparate types of information. As such, it is viewed in some quarters as an art, but most interpretation follows an orderly logical process, often called scientific methodology, using the methods of deduction or induction to proceed from processed data to a successful conclusion.

For simple survey problems, the interpretation phase is largely qualitative and is essentially terminated with the successful identification and isolation of anomalies. For example, if the location of bedrock highs is the objective of a gravity survey, the interpretation is completed with the isolation of gravity anomaly highs associated with the greater density bedrock contrasting with the overburden of unconsolidated sediments. In this and similar cases, the distinction between the data processing and interpretation phases becomes blurred. If the goal of the gravity survey is not simply to isolate bedrock highs, but is to determine the bedrock configuration, a more quantitative interpretation procedure must be applied.

Quantitative interpretation uses inversion to quantify possible geometric and physical property parameters of the subsurface that can satisfy the observed data. The essential element of inversion is the forward model that produces a synthetic set of estimates or effects for comparison with the actual observations. Acceptable models of the subsurface are typically judged by how well the modeled effects match the observed data in amplitude and shape. However, an acceptable model cannot guarantee a unique solution

for the data because the forward model is always a mathematical simplification of the subsurface conditions, and it and the observed data always contain errors. In addition, the non-uniqueness of gravity and magnetic inversions is further exacerbated by the inherent source ambiguity of any anomaly solution. Thus, ancillary geological and geophysical constraints are commonly invoked to limit the range of acceptable models from an inversion.

Multiple approaches are available for solving inversion problems. A common methodology involves trial-and-error comparisons of observed geophysical signals with the effects from a presumed subsurface model. Through an iterative process the parameters of the presumed subsurface model are modified until a close match is obtained between the observed and estimated values. This so-called forward or direct modeling approach is especially appropriate when dealing with a relatively small data set and a simple subsurface model where only a few unknown parameters must be evaluated.

For more complex inverse problems involving greater numbers of observations and model unknowns, so-called inverse modeling approaches are desirable. These approaches commonly assume the forward model of the relevant volume of the Earth from the measurements, their distribution, and boundary conditions imposed by the geological setting. Modern inversions typically invoke the linear forward model as a series of simultaneous equations where the unknown geometric or physical property parameters can be estimated by fast matrix inversion methods.

The nonlinear forward model has more limited use because the computational labor of implementing the related inversion is much greater than for linear inversion. The nonlinear inversion requires the investigator to explore solution space generated typically by a large number of simulations where values of the unknown parameters have been randomly selected. These simulations, for example Monte Carlo simulations, are graphically or numerically processed for solution maxima or minima that may mark acceptable solutions.

A final step in the interpretation phase is to transform the quantitative model obtained by inversion into appropriate geological parameters. That is, the geometric and physical property estimates that satisfy the anomalous field must be converted into an effective geological context. For example, the geological significance of the physical properties or property contrasts interpreted from the observed data is best appreciated when related to the lithology and secondary physical characteristics of the formations. This is illustrated in Figure 1.5 where an observed gravity anomaly is shown that is closely matched by the effect of a cylindrical source of a positive density contrast.